
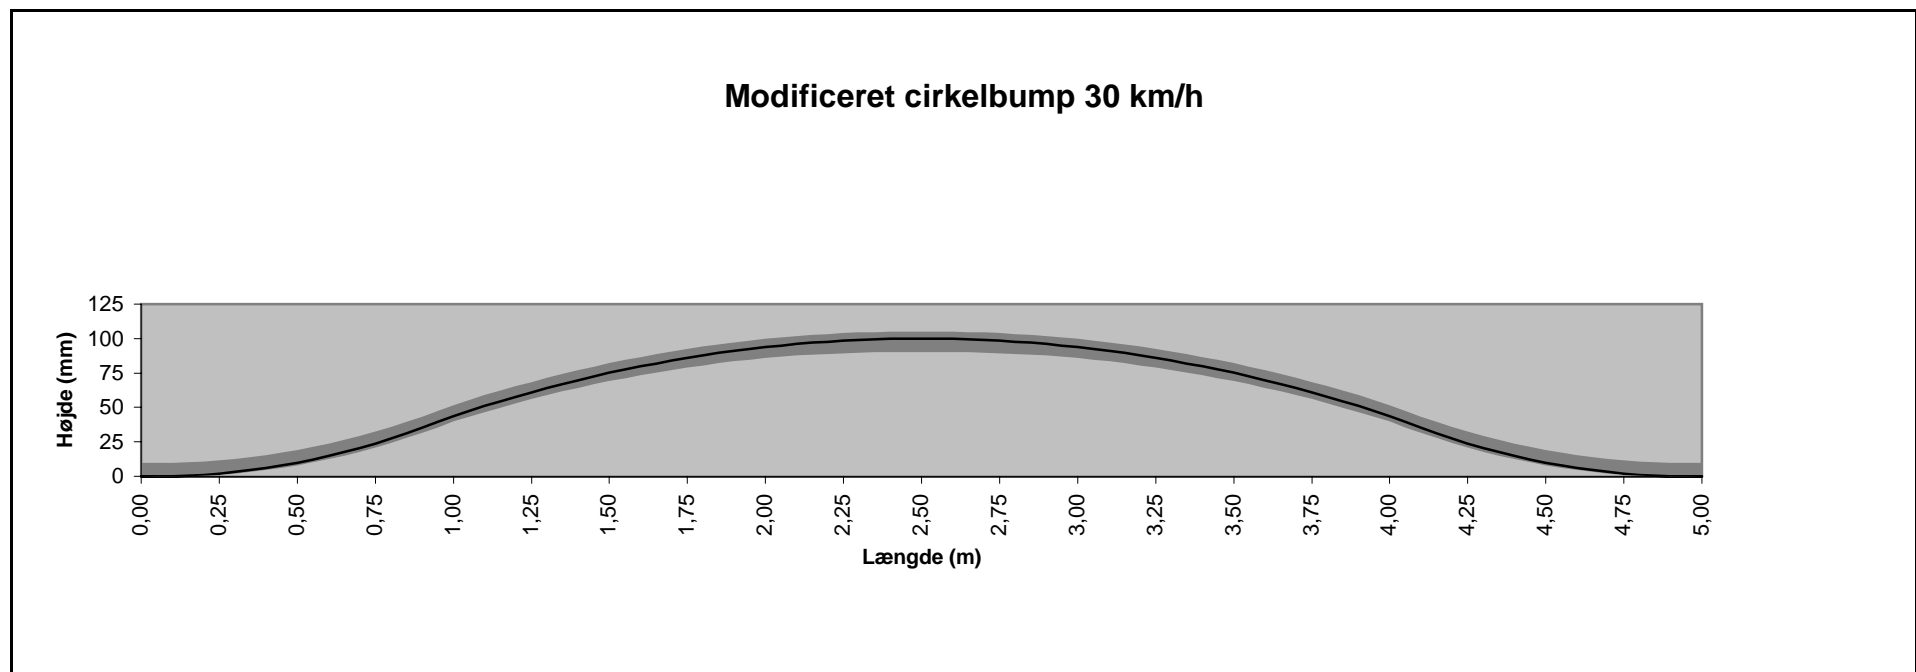


Katalog	Typegodkendte fartdæmpere			 Vejdirektoratet	
Bumtype	Modificeret cirkelbump				
Ønsket hastighed	30 km/h	Passagehastighed tunge køretøjer	15 km/h	Bilag nr.	2-3



Bumplængde (m)	0,00	0,25	0,50	0,75	1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	3,75	4,00	4,25	4,50	4,75	5,00	
Bumphøjde (mm)	0	3	10	26	44	61	75	86	94	98	100	98	94	86	75	61	44	26	10	3	0	
Pos. tolerance (mm)	+10	+10	+9	+9	+8	+8	+7	+7	+6	+6	+5	+6	+6	+7	+7	+8	+8	+9	+9	+10	+10	
Neg. tolerance (mm)	0	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-9	-8	-7	-6	-5	-4	-3	-2	-1	0	